
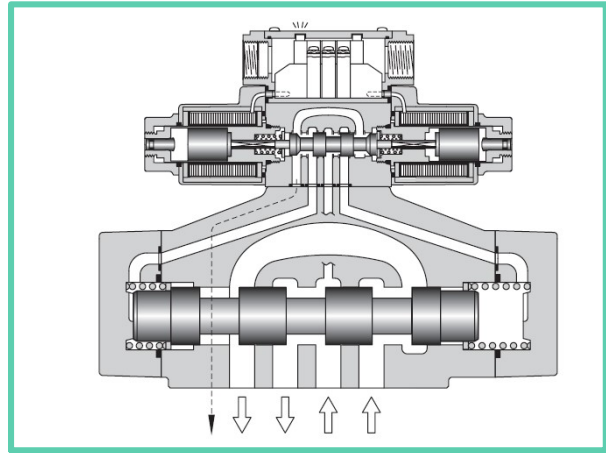



### Solenoid Controlled Pilot Operated Directional Valves

These valves are composed of a solenoid operated pilot valves and a pilot operated slave valve. When a solenoid is energised the pilot valve directs the flow to move the spool of the slave valve, thus changing the direction of flow in the hydraulic circuit.

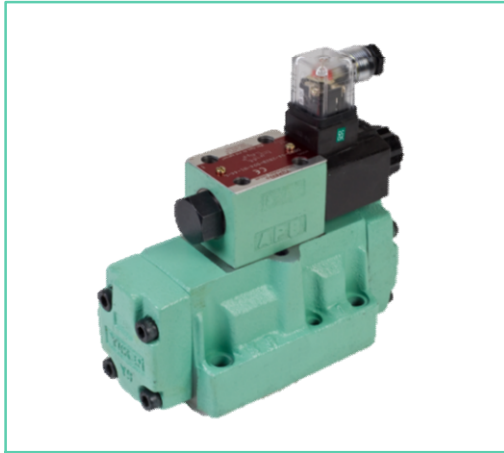

- **High Pressure High Flow**  
High pressure [315 Kg/cm<sup>2</sup>] along with high flow means compact system design.
- **Lower pressure Drop**  
System energy saving increased as pressure drop of each valve has greatly reduced.

Graphic symbol



### Specifications


Valve Type	Model Numbers	*1 Max. Flow L/min	Max. Operating Pressure Kg/cm <sup>2</sup>	Max. Pilot Pressure Kg/cm <sup>2</sup>	Min. *2 Required Pilot Pres. Kg/cm <sup>2</sup>	Max. T-Line Back Pressure Kg/cm <sup>2</sup>		Max. Changeover Frequency Cycles/min			Mass Kg
						Ext. Drain	Int. Drain	AC	DC	R	
Standard Type	(S)-DSHG-04-3C※-※-50	300	315	250	8	210	160	120	120	120	8.8
	(S)-DSHG-04-2N※-※-50										8.8
	(S)-DSHG-04-2B※-※-50										8.2
Shockless Type	(S)-DSHG-06-3C※-※-51	500	315	250	8	210	160	120	120	120	12.7
	(S)-DSHG-06-2N※-※-51										12.7
	(S)-DSHG-06-2B※-※-51			12.1							
	(S)-DSHG-06-3H※-※-51			13.5							
Shockless Type	(S)-DSHG-10-3C※-※-41	1100	315	250	10	210	160	120	120	100	45.3
	(S)-DSHG-10-2N※-※-41			45.3							
	(S)-DSHG-10-2B※-※-41			44.7							
	(S)-DSHG-10-3H※-※-41			53.1							

\* 1. Maximum flow indicates a ceiling flow. As the ceiling flow depends on the type of spool and operating condition, refer to the list of Spool Functions in pages 360 to 362 for details.


\* 2. Pilot pressure of internal pilot drain models must always exceed tank line back pressure by the minimum required pilot pressure.

Expanded symbol

- **DSHG-04**



- **DSHG-06, 10**

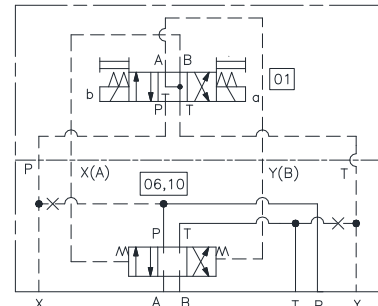

### Solenoid Controlled Pilot Operated Directional Valves

**Model Number Designation**

F-	S-	DSH	G	-06	-2	B	2	A	-C2 *	-E	T	-R2 *	-D24	-N	-51	-L
Special Seals	Type	Series Number	Type of Mounting	Valve Size	Number of Valve Positions	Spool-Spring Arrangement	Spool Type	Special Two Position Valve	Models with Pilot Choke Valve	Pilot Connection	Drain Connection	Spool Control Modification (Omit if not required)	Coil Type	Type of Electrical Conduit Con.	Design Number	Mod. With Alternate Offset Sol.
<b>F:</b> For Phosphate Ester Type Fluids  <b>S:</b> Shockless Type	<b>None:</b> Standard Type  <b>DSH:</b> Solenoid Controlled Pilot Operated Directional Valve.  <b>S:</b> Shockless Type	<b>DSH:</b> Solenoid Controlled Pilot Operated Directional Valve.	<b>G:</b> Sub-plate Mounting	<b>04</b>	<b>3</b>	<b>C:</b> Spring Centred 2,4, 40,60, 10,12 (3,5, 6,*17, 9,11)	---	<b>C1:</b> * With C1 Choke  <b>C2:</b> * With C2 Choke  <b>C1C2:</b> * With C1&C2 Choke  (Omit if not Required)	<b>None:</b> Internal Pilot  <b>None:</b> External Drain  <b>E:</b> External Pilot	<b>None:</b> External Drain  <b>T:</b> Internal Drain	<b>R2:</b> With Stroke Adjustment, Both Ends  <b>RA:</b> With Stroke Adjustment Port "A" End  <b>RB:</b> With Stroke Adjustment Port "B" End	<b>AC:</b> A100, A120, A200, A240  <b>DC:</b> D12, D24, D100  <b>R:</b> *3 (AC→DC) R110, R220	<b>None:</b> Terminal Box Type  <b>N0:</b> Plug-in Type, but Without Connector  <b>N:</b> Plug-in Connector Type  <b>N1:</b> Plug-in Connector with indicator Light	<b>50</b>	<b>L:</b> (Omit if not Required)	---
						<b>N:</b> No-Spring 2,4, 40,6, 60,9, 12 (3,7) *1	A *2 (Omit if not Required)									
					<b>B:</b> Spring Offset 2,4, 40,60, 10,12 (3,7) *1	A *2 B *2 (Omit if not Required)										
					<b>C:</b> Spring Centred 2,4, 40,60, 10,12 (3,5, 6 *17, 9,11)	---										
				<b>06</b>	<b>3</b>	<b>C:</b> Spring Centred 2,4, 40,60, 10,12 (3,5, 6 *17, 9,11)	---									
						<b>N:</b> No-Spring 2,4, 40 (3,7) *1	A *2 (Omit if not Required)									
					<b>10</b>	<b>B:</b> Spring Offset 2,4, 40, (3,7) *1	A *2 B *2 (Omit if not Required)									
						<b>C:</b> Spring Centred 2,4, 40,60, 10,12 (3,5, 6 *17, 9,11)	---									

Note :

- Options are marked with \*
- In spool type "3", "5", "6", "40" and "7", the combination applicable between pilot system & drain system is as described in the table below.

\*\* Before ordering the Special Seals, consult YUKEN INDIA LTD.

Pilot connection	Drain Connection	Care in Application
Internal Pilot	External Drain	Hold back pressure in the tank line so that the difference between pilot pressure and drain pressure is always more than minimum required pilot pressure
	Internal Drain (T)	Combination not available.
External Pilot (E)	External Drain	No Limitation in use.
	Internal Drain (T)	

\*1 Shockless type (S-DSHG) are not available for spool type marked ().

\*2 Other spool types for special 2-position valves are available in addition to spool type 2, 3, 4, 40 and 7.

[Refer to the column "valves with centre position and one offset position" (Special 2-position valve) on page 362.

\*3 Coil type "R" is not available for plug-in connector with Indicator type "N1".

**Solenoid Ratings**

Solenoid ratings of pilot valve are identical with those of standard solenoid valve. Refer to relevant solenoid ratings described on the page below.

Model Numbers	Pilot Valve Model Numbers	Solenoid Rating described on The page below
(S)-DSHG-04	DSG-01-***-50	EIC-E-1001 Page No.331
(S)-DSHG-06		
(S)-DSHG-10		

**Sub-plates**

Valve Model Numbers	Sub-plate Model Numbers	Thread Size	Approx. Mass Kg
DSHG-04	DHGM-04-2080	1/2 BSP.F	4.4
	DHGM-04X-2080	3/4 BSP.F	4.1
DSHG-06	DHGM-06-5080	3/4 BSP.F	8.5
	DHGM-06X-5080	1 BSP.F	
DSHG-10	DHGM-10-4080	1-1/4 BSP.F	21.5
	DHGM-10X-4080	1-1/2 BSP.F	

- Sub-plates are available. Specify sub-plate model from the table above. When Sub-plates are not used, the mounting surface should have a good machined finish.

**Mounting Bolts**

Model Numbers	Name	Mounting Bolt	Qty.	Mounting Bolt Ordering Code
DSHG-04	Soc. Hd. Cap. Screw	M6 x 45 Lg.	2	BKDHG-04-50
		M10 x 50 Lg.	4	
DSHG-06	Soc. Hd. Cap. Screw	M12 x 60 Lg.	6	BKDHG-06-50
DSHG-10	Soc. Hd. Cap. Screw	M20 x 75 Lg.	6	BKDHG-10-40



**Options**

- Models with Pilot Choke Adjustment (C1/C2/C1C2)**

“C1” Models --- By turning the adjusting screw clockwise, main spool changeover speed by the pilot pressure can be lowered. But centering speed of spring centered modes can not be changed.

“C2” Models --- When the adjusting screw is turned clockwise, main spool changeover speed can be lowered and centering speed of spring centered models can be also lowered.

Graphic symbols (Ex. Spring Centered)

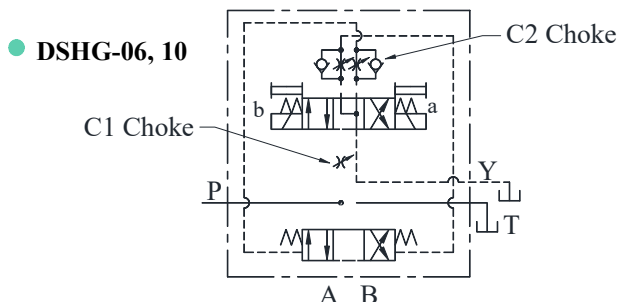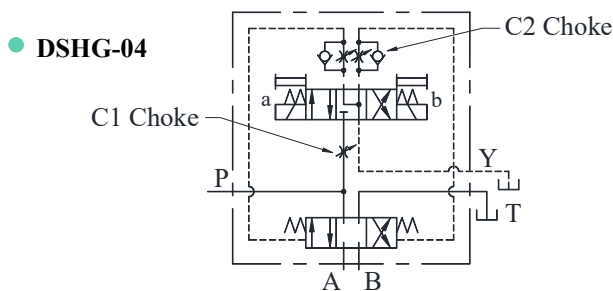


- Models with Pilot Stroke Adjustment (R2/RA/RB)**


When the adjusting screw is screwed in, the main spool stroke becomes short and flow rate reduces.

Graphic symbols (Ex. Spring Centered)


- “R2” Models



- “RA” Models



- “RB” Models




- Additional Mass of Options**

Add mass of options described below to mass of standard type if options are used.


Model Numbers	Models with Pilot Choke Adj.		Models With Stroke Adj.	
	C1,C2	C1C2	R2	RA RB
(S-)DSHG-04	0.65	1.3	1.0	0.5
(S-)DSHG-06	0.65	1.3	1.2	0.6
(S-)DSHG-10	0.65	1.3	3.7	1.85

**List of Spool Functions (DSHG-04/S-DSHG-04)**

**Three Positions**


Spool Type	Graphic Symbol 	Spring Centered				
		Maximum Flow L/min.				
		100 Kgf/cm <sup>2</sup>	160 Kgf/cm <sup>2</sup>	250 Kgf/cm <sup>2</sup>	315 Kgf/cm <sup>2</sup>	
"2"		DSHG-04-3C2	300	300	200	145
		S-DSHG-04-3C2	300	250	120	110
"3"		DSHG-04-3C3	300	300	300	300
"4"		DSHG-04-3C4	300	300	250	165
		S-DSHG-04-3C4	300	300	140	110
"40"		DSHG-04-3C40	300	300	200	145
		S-DSHG-04-3C40	300	250	120	110
"5"		DSHG-04-3C5	250	250	245	245
"6"		DSHG-04-3C6	300	260	245	235
"60"		DSHG-04-3C60	300	300	300	300
		S-DSHG-04-3C60				
"7"		DSHG-04-3C7	300	300	200	145
"9"		DSHG-04-3C9	300	300	280	250
		S-DSHG-04-3C9	300	250	120	110
"10"		DSHG-04-3C10	300	300	200	150
		S-DSHG-04-3C10	300	250	120	110
"11"		DSHG-04-3C11	300	260	160	140
"12"		DSHG-04-3C12	300	280	170	135
		S-DSHG-04-3C12	300	250	120	110

**Two Positions**

Spool Type	Graphic Symbol 	No-Spring				Spring Offset					
		Maximum Flow L/min.				Maximum Flow L/min.					
		100 Kgf/cm <sup>2</sup>	160 Kgf/cm <sup>2</sup>	250 Kgf/cm <sup>2</sup>	315 Kgf/cm <sup>2</sup>	100 Kgf/cm <sup>2</sup>	160 Kgf/cm <sup>2</sup>	250 Kgf/cm <sup>2</sup>	315 Kgf/cm <sup>2</sup>		
"2"		(S-)DSHG-04-2N2	300	300	300	300	(S-)DSHG-04-2B2	300	300	300	300
"3"		DSHG-04-2N3	300	300	300	300	DSHG-04-2B3	300	300	300	300
"4"		(S-)DSHG-04-2N4	300	300	300	300	(S-)DSHG-04-2B4	300	300	300	300
"40"		(S-)DSHG-04-2N40	300	300	300	300	(S-)DSHG-04-2B40	300	300	300	300
"7"		DSHG-04-2N7	300	300	300	300	DSHG-04-2B7	300	300	300	300















Note:

- Max. Flow described above shows value at pilot pressure more than 6 Kgf/cm<sup>2</sup>.
- Max. Flow shows value at the condition of the flow as shown in right figure P→A→B→T (or P→B→A→T).  
Max. Flow differs according to hydraulic circuit, if port "A" or "B" is blocked. Consult Yuken for such application.
- For values in the double row, upper is maximum flow at pilot pressure 5Kgf/cm<sup>2</sup>. (In case pressure centered model, pilot pressure is 5 Kgf/cm<sup>2</sup>), lower is pilot pressure of 7 Kgf/cm<sup>2</sup>.










List of Spool Functions (DSHG-06/S-DSHG-06)

Three Positions


Spool Type	Spring Centered					Pressure Centered					
	Graphic Symbol 	Maximum Flow L/min				Graphic Symbol 	Maximum Flow L/min				
		100 Kgf/cm <sup>2</sup>	160 Kgf/cm <sup>2</sup>	250 Kgf/cm <sup>2</sup>	315 Kgf/cm <sup>2</sup>		100 Kgf/cm <sup>2</sup>	160 Kgf/cm <sup>2</sup>	250 Kgf/cm <sup>2</sup>	315 Kgf/cm <sup>2</sup>	
"2"		(S-)DSHG-06-3C2	500	500	410 500	310 500	(S-)DSHG-06-3H2	500	500	500	420 500
"3"		DSHG-06-3C3	500	500	460	370	DSHG-06-3H3	500	500	500	500
"4"		(S-)DSHG-06-3C4	500	500	410 500	310 500	(S-)DSHG-06-3H4	500	500	500	420 500
"40"		(S-)DSHG-06-3C40	500	500	410 500	310 500	(S-)DSHG-06-3H40	500	500	500	420 500
"5"		DSHG-06-3C5	500	500	425	350	DSHG-06-3H5	500	500	500	470 500
"6"		DSHG-06-3C6	475	390	300	230	DSHG-06-3H6	500	500	500	420 500
"60"		(S-)DSHG-06-3C60	475	420	340	280	(S-)DSHG-06-3H60	500	500	500	420 500
"7"		DSHG-06-3C7	500	500	450	360	DSHG-06-3H7	500	500	500	500
"9"		DSHG-06-3C9	500	500	450 500	360 500	DSHG-06-3H9	500	500	500	500
"10"		(S-)DSHG-06-3C10	500	500	410 500	310 500	(S-)DSHG-06-3H10	500	500	500	460 500
"11"		DSHG-06-3C11	500	500	410 500	310 500	DSHG-06-3H11	500	500	500	460 500
"12"		(S-)DSHG-06-3C12	500	500	410 500	310 500	(S-)DSHG-06-3H12	500	500	500	460 500

Two Positions

Spool Type	No-Spring					Spring Offset					
	Graphic Symbol 	Maximum Flow L/min				Graphic Symbol 	Maximum Flow L/min				
		100 Kgf/cm <sup>2</sup>	160 Kgf/cm <sup>2</sup>	250 Kgf/cm <sup>2</sup>	315 Kgf/cm <sup>2</sup>		100 Kgf/cm <sup>2</sup>	160 Kgf/cm <sup>2</sup>	250 Kgf/cm <sup>2</sup>	315 Kgf/cm <sup>2</sup>	
"2"		(S-)DSHG-06-2N2	500	500	500	500	(S-)DSHG-06-2B2	500	500	500	500
"3"		DSHG-06-2N3	500	500	500	500	DSHG-06-2B3	500	500	500	500
"4"		(S-)DSHG-06-2N4	500	500	500	500	(S-)DSHG-06-2B4	500	500	500	500
"40"		(S-)DSHG-06-2N40	500	500	500	500	(S-)DSHG-06-2B40	500	500	500	500
"7"		DSHG-06-2N7	500	500	500	500	DSHG-06-2B7	500	500	500	500















Note: 1 Relation between max. flow and pilot pressure is:

- Value in the single column is constant regardless of pilot pressure subject to pilot pressure more than 8 Kgf/cm<sup>2</sup>. In case pressure centered models, pilot pressure is more than 10 Kgf/cm<sup>2</sup>.
  - For values in the double row, upper is max. flow at pilot pressure 8 Kgf/cm<sup>2</sup>. (In case pressure centered models, pilot pressure is 10 Kgf/cm<sup>2</sup> or more.) Lower is pilot pressure of 15 Kgf/cm<sup>2</sup>.
- 2 Max. Flow shows value at the condition of the flow as shown in right figure P→A→B→T (or P→B→A→T).  
Max. Flow differs according to hydraulic circuit, if port "A" or "B" is blocked, consult Yuken for such application.










**List of Spool Functions (DSHG-10/S-DSHG-10)**

**Three Positions**


Spool Type	Spring Centered					Pressure Centered				
	Graphic Symbol 	Maximum Flow L/min				Graphic Symbol 	Maximum Flow L/min			
		100 Kgf/cm <sup>2</sup>	160 Kgf/cm <sup>2</sup>	250 Kgf/cm <sup>2</sup>	315 Kgf/cm <sup>2</sup>		100 Kgf/cm <sup>2</sup>	160 Kgf/cm <sup>2</sup>	250 Kgf/cm <sup>2</sup>	315 Kgf/cm <sup>2</sup>
"2"	 (S-)DSHG-10-3C2	1100	1100	950 1100	750 1100	(S-)DSHG-10-3H2	1100	1100	1100	970 1100
"3"	 DSHG-10-3C3	1100	1100	1060	895	DSHG-10-3H3	1100	1100	1100	1050 1100
"4"	 (S-)DSHG-10-3C4	1100	1100	950 1100	750 1100	(S-)DSHG-10-3H4	1100	1100	1100	970 1100
"40"	 (S-)DSHG-10-3C40	1100	1100	950 1100	750 1100	(S-)DSHG-10-3H40	1100	1100	1100	970 1100
"5"	 DSHG-10-3C5	1100	1100	980	850	DSHG-10-3H5	1100	1100	1100	1000 1100
"6"	 DSHG-06-3C6	1050	880	700	570	DSHG-10-3H6	1100	1100	1100	970 1100
"60"	 (S-)DSHG-10-3C60	1050	940	785	680	(S-)DSHG-10-3H60	1100	1100	1100	970 1100
"7"	 DSHG-10-3C7	1100	1100	1040 1100	870 1100	DSHG-10-3H7	1100	1100	1100	1100
"9"	 DSHG-10-3C9	1100	1100	1040	870	DSHG-10-3H9	1100	1100	1100	1100
"10"	 (S-)DSHG-10-3C10	1100	1100	950 1100	750 1100	(S-)DSHG-10-3H10	1100	1100	1100	1060 1100
"11"	 DSHG-10-3C11	1100	1100	950 1100	750 1100	DSHG-10-3H11	1100	1100	1100	1060 1100
"12"	 (S-)DSHG-10-3C12	1100	1100	950 1100	750 1100	(S-)DSHG-10-3H12	1100	1100	1100	1060 1100

**Two Positions**

Spool Type	No-Spring					Spring Offset				
	Graphic Symbol 	Maximum Flow L/min				Graphic Symbol 	Maximum Flow L/min			
		100 Kgf/cm <sup>2</sup>	160 Kgf/cm <sup>2</sup>	250 Kgf/cm <sup>2</sup>	315 Kgf/cm <sup>2</sup>		100 Kgf/cm <sup>2</sup>	160 Kgf/cm <sup>2</sup>	250 Kgf/cm <sup>2</sup>	315 Kgf/cm <sup>2</sup>
"2"	 (S-)DSHG-10-2N2	1100	1100	1100	1100	(S-)DSHG-10-2B2	1100	1100	1100	1100
"3"	 DSHG-10-2N3	1100	1100	1100	1100	DSHG-10-2B3	1100	1100	1100	1100
"4"	 (S-)DSHG-10-2N4	1100	1100	1100	1100	(S-)DSHG-10-2B4	1100	1100	1100	1100
"40"	 (S-)DSHG-10-2N40	1100	1100	1100	1100	(S-)DSHG-10-2B40	1100	1100	1100	1100
"7"	 DSHG-10-2N7	1100	1100	1100	1100	DSHG-10-2B7	1100	1100	1100	1100


Note :

- Relation between max. flow and pilot pressure is
  - Value in the single column is constant regardless of pilot pressure subject to pilot pressure more than 10 Kgf/cm<sup>2</sup>.
  - For values in the double row, upper is max. flow at pilot pressure 10 Kgf/cm<sup>2</sup>. Lower is pilot pressure of 15 Kgf/cm<sup>2</sup>.
- Max. Flow shows value at the condition of the flow as shown in right figure  
 P→A→B→T (or P→B→A→T).  
 Max. Flow differs according to hydraulic circuit, if port "A" or "B" is Blocked, consult Yuken for such application.



**Spring Offset Valves with Alternate Solenoid**


Though our standard spring offset models use solenoid "b", alternate models using solenoid "a" are also available. The graphic symbols are expressed as below. For Models 2B※-A and 2B※B, refer to table as below.

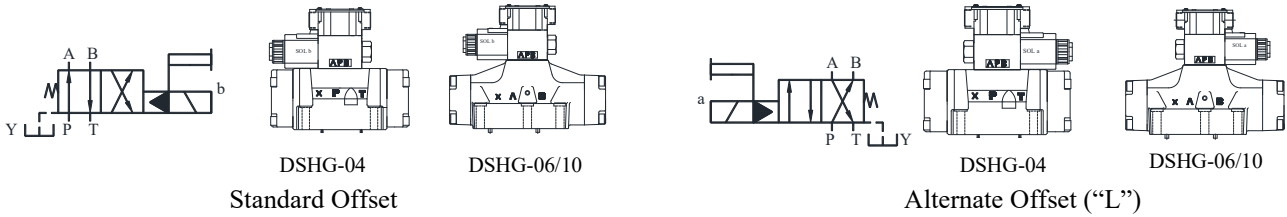

**Valve with Centre Position and One Offset Position (Special Two Position Valve)**

In addition to the standard two position valves as shown in the table on pages 360 to 362 two kinds of valves are available with center position and either one of two offset positions. Standard and alternate offset types use solenoid "b" and solenoid "a" respectively.

**(Example) In case of spool Type "2"**

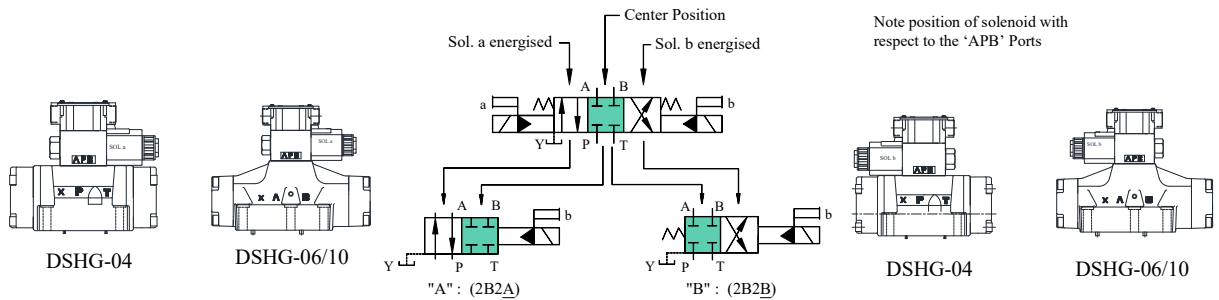


Model Numbers	Graphic Symbols		Model Numbers	Graphic Symbols		Model Numbers	Graphic Symbols
	Standard Offset Type	Alternate Offset Type		Standard Offset Type	Alternate Offset Type		Standard Offset Type
04 ※-DSHG-06-2B※A 10			04 ※-DSHG-06-2B※B 10			04 ※-DSHG-06-2N※A 10	
(S-)DSHG-※-2B2A			(S-)DSHG-※-2B2B			(S-)DSHG-※-2N2A	
DSHG-※-2B3A			DSHG-※-2B3B			DSHG-※-2N3A	
(S-)DSHG-※-2B4A			(S-)DSHG-※-2B4B			(S-)DSHG-※-2N4A	
(S-)DSHG-※-2B40A			(S-)DSHG-※-2B40B			(S-)DSHG-※-2N40A	
DSHG-※-2B5A			DSHG-※-2B5B			DSHG-※-2N5A	
DSHG-※-2B6A			DSHG-※-2B6B			DSHG-※-2N6A	
(S-)DSHG-※-2B60A			(S-)DSHG-※-2B60B			(S-)DSHG-※-2N60A	
DSHG-※-2B7A			DSHG-※-2B7B			DSHG-※-2N7A	
DSHG-※-2B9A			DSHG-※-2B9B			DSHG-※-2N9A	
(S-)DSHG-※-2B10A			(S-)DSHG-※-2B10B			(S-)DSHG-※-2N10A	
DSHG-※-2B11A			DSHG-※-2B11B			DSHG-※-2N11A	
(S-)DSHG-※-2B12A			(S-)DSHG-※-2B12B			(S-)DSHG-※-2N12A	



**Pressure Drop**

Pressure drop curves based on viscosity of 35cSt and specify gravity of 0.850.


● **DSHG-04, S-DSHG-04**

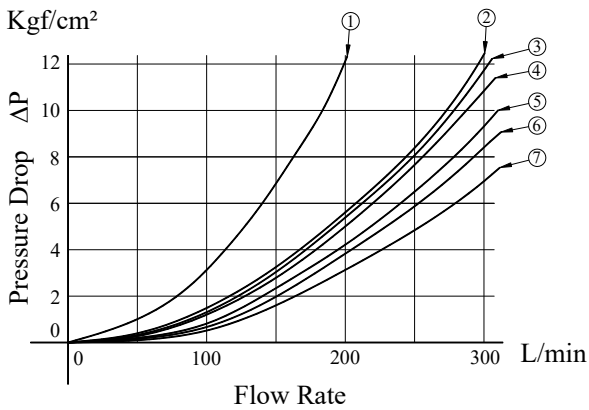

Spool Type	Pressure Drop Curve Numbers					Spool Type	Pressure Drop Curve Numbers				
	P→A	B→T	P→B	A→T	P→T		P→A	B→T	P→B	A→T	P→T
2	⑤(②)	④(②)	⑤(②)	⑥(④)	-	60	⑦	⑤	⑦	⑦	②
3	⑤	③	⑤	⑤	⑦	7	⑤	④	⑤	⑥	-
4	⑤(②)	③(③)	⑤(②)	⑤(⑤)	-	9	⑤	④	⑤	⑥	-
40	⑤(②)	④(④)	⑤(②)	⑥(⑥)	-	10	⑤(②)	②(②)	⑤(②)	⑥(④)	-
5	⑦	④	⑤	⑤	⑤	11	⑥	④	⑤	⑥	-
6	⑤(⑥)	③(④)	⑤(⑥)	⑥(⑦)	①(②)	12	⑤(②)	④(②)	⑤(②)	⑤(⑤)	-


Note : Figures enclosed ( ) shows curve number for shockless type (S-DSHG-04).

● **DSHG-06, S-DSHG-06**

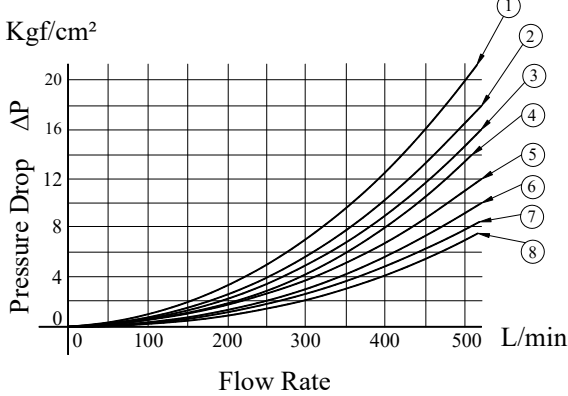

Spool Type	Pressure Drop Curve Numbers					Spool Type	Pressure Drop Curve Numbers				
	P→A	B→T	P→B	A→T	P→T		P→A	B→T	P→B	A→T	P→T
2	⑧(⑥)	⑤(①)	⑧(⑥)	⑦(②)	-	60	⑤(⑥)	⑤(②)	⑥(⑥)	⑦(③)	③(①)
3	⑥	④	⑥	⑦	⑥	7	⑥	④	⑥	⑦	-
4	⑧(⑥)	⑤(②)	⑧(⑥)	⑦(②)	-	9	⑥	⑤	⑥	⑦	-
40	⑧	⑤	⑧	⑦	-	10	⑧	⑤	⑧	⑦	-
5	⑧	④	⑤	⑦	②	11	⑧	④	⑤	⑦	-
6	⑤	①	⑤	④	③	12	⑧	⑤	⑧	⑦	-

● **DSHG-10, S-DSHG-10**

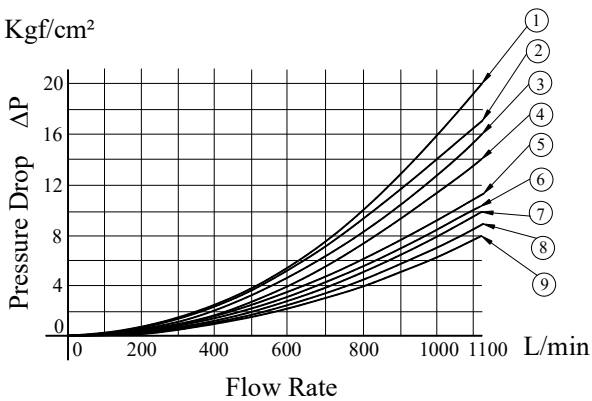

Spool Type	Pressure Drop Curve Numbers					Spool Type	Pressure Drop Curve Numbers				
	P→A	B→T	P→B	A→T	P→T		P→A	B→T	P→B	A→T	P→T
2	⑨(⑧)	⑥(③)	⑨(⑧)	⑧(④)	-	60	⑧(⑧)	⑤(④)	⑧(⑧)	⑤(④)	③(②)
3	⑦	⑥	⑦	⑦	⑤	7	⑦	⑥	⑦	⑦	-
4	⑨(⑧)	⑥(⑤)	⑨(⑧)	⑥(⑥)	-	9	⑦	⑥	⑦	⑦	-
40	⑨	⑥	⑨	⑧	-	10	⑨	⑤	⑨	⑧	-
5	⑨	⑥	⑧	⑥	①	11	⑨	⑥	⑧	⑦	-
6	⑤	③	⑤	④	②	12	⑨	⑦	⑨	⑥	-

For any other viscosity, multiply by the factors in the table right.

For any other specific gravity (G'), the pressure drop (ΔP') may be obtained from the formula below.


$$\Delta P' = \Delta P (G'/0.850)$$

Viscosity cSt	15	20	30	40	50	60	70	80	90	100
Factor	0.81	0.87	0.96	1.03	1.09	1.14	1.19	1.23	1.27	1.30






■ **Terminal Box Type : (S)-DSHG-04-\*\*\*-50**

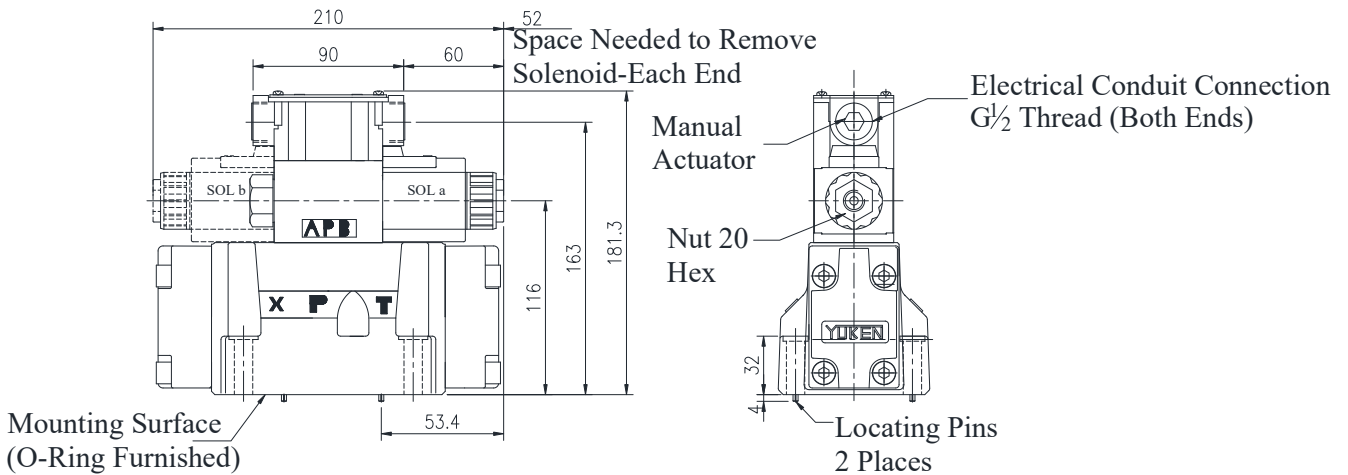


■ **Plug-in Connector Type : (S)-DSHG-06-\*\*\*-N1-51**

Mounting Surface:  
ISO 4401-AE-08-4-A

**DIMENSIONS IN MILLIMETRES**

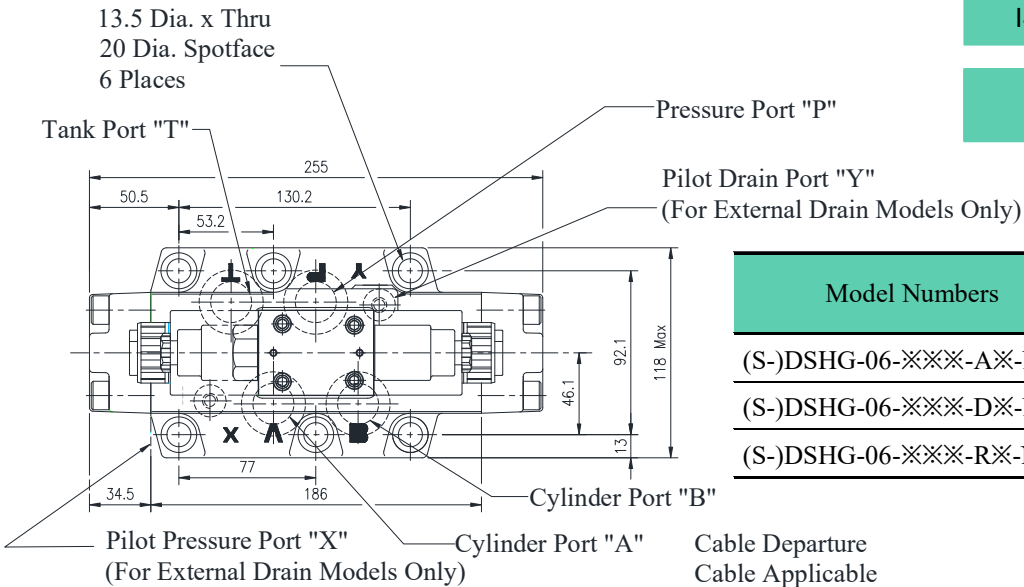


Model Numbers	Dimensions mm			
	C	D	E	F
(S)-DSHG-06-***-A*-N/N1	39	53	202	27.5
(S)-DSHG-06-***-D*-N/N1	39	64	213	27.5
(S)-DSHG-06-***-R*-N	53	57.2	216	34

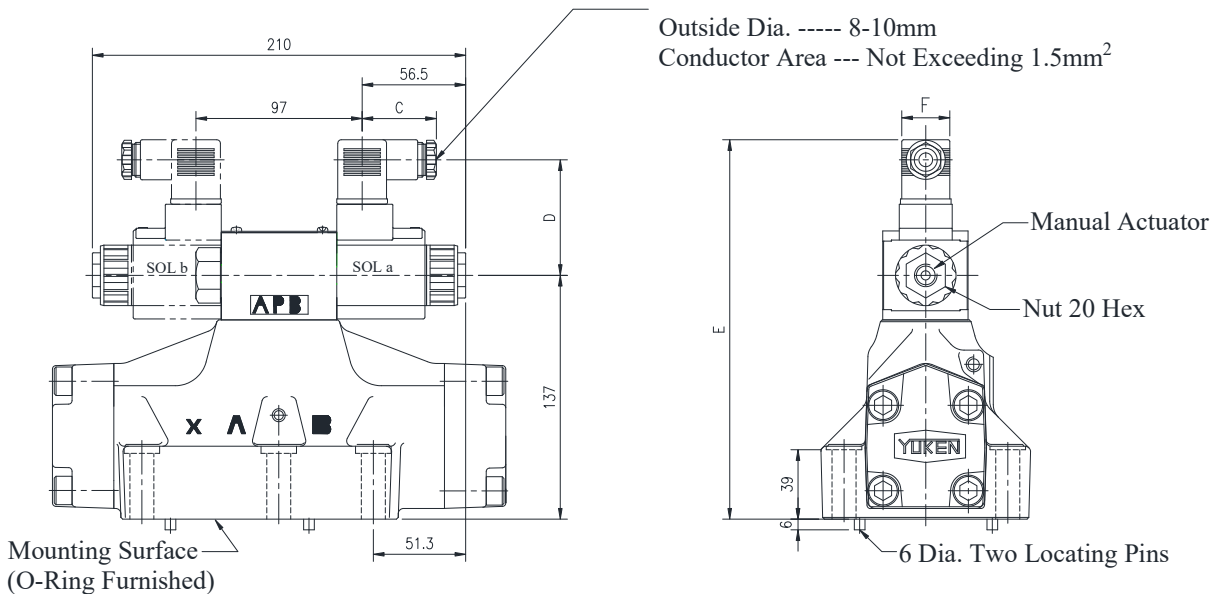


Position of cable departure can be changed. For details, refer to DSG-01 valve on EIC-E-1001 Page 339.

**Solenoid Controlled Pilot Operated Directional Valves**

**Terminal Box Type : (S)-DSHG-06-\*\*\*-\*\*-51**

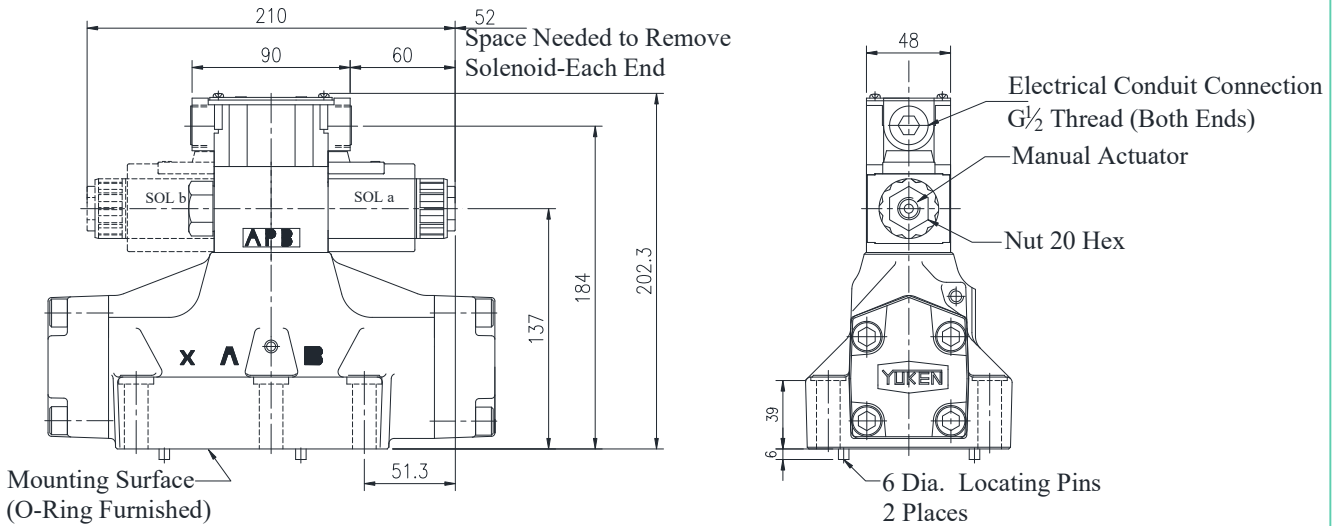


**Plug-in Connector Type : (S)-DSHG-10-\*\*\*-\*\*-N-41**

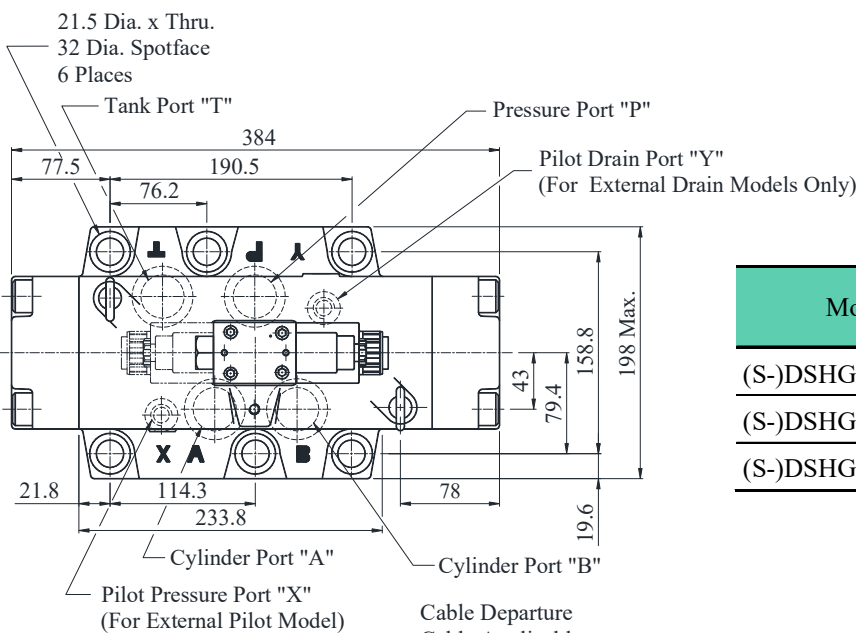

Mounting Surface:  
ISO 4401-AE-10-4-A

**DIMENSIONS IN  
MILLIMETRES**

Model Numbers	Dimensions mm			
	C	D	E	F
(S)-DSHG-10-***-A*-N/N1	39	53	265	27.5
(S)-DSHG-10-***-D*-N/N1	39	64	276	27.5
(S)-DSHG-10-***-R*-N	53	57.2	279	34

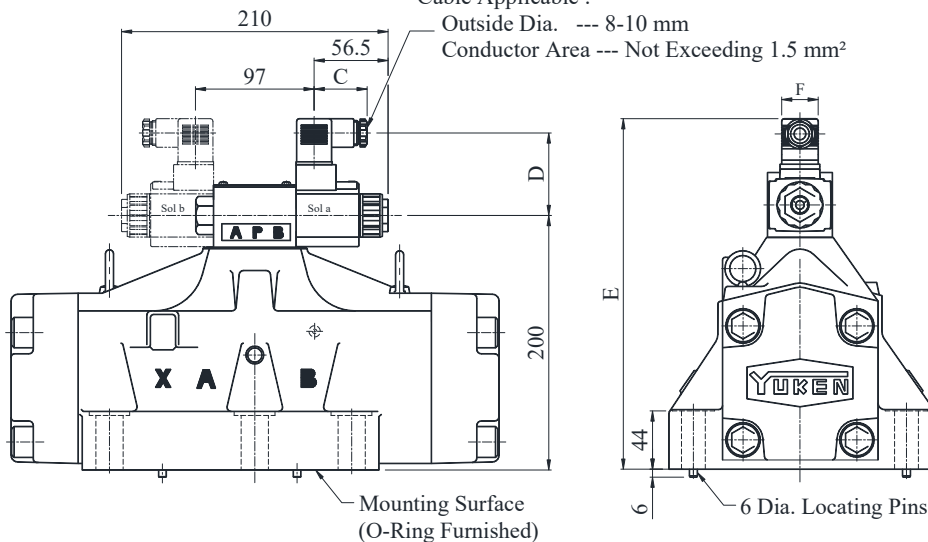


Position of cable departure can be changed. For details, refer to DSG-01 valve on EIC-E-1001 Page 339.

**Solenoid Controlled Pilot Operated Directional Valves**

**E**  
DSG-03 Series Solenoid Operated Directional Valves

■ **Terminal Box Type : (S)-DSHG-10-\*\*\*-\*-41**

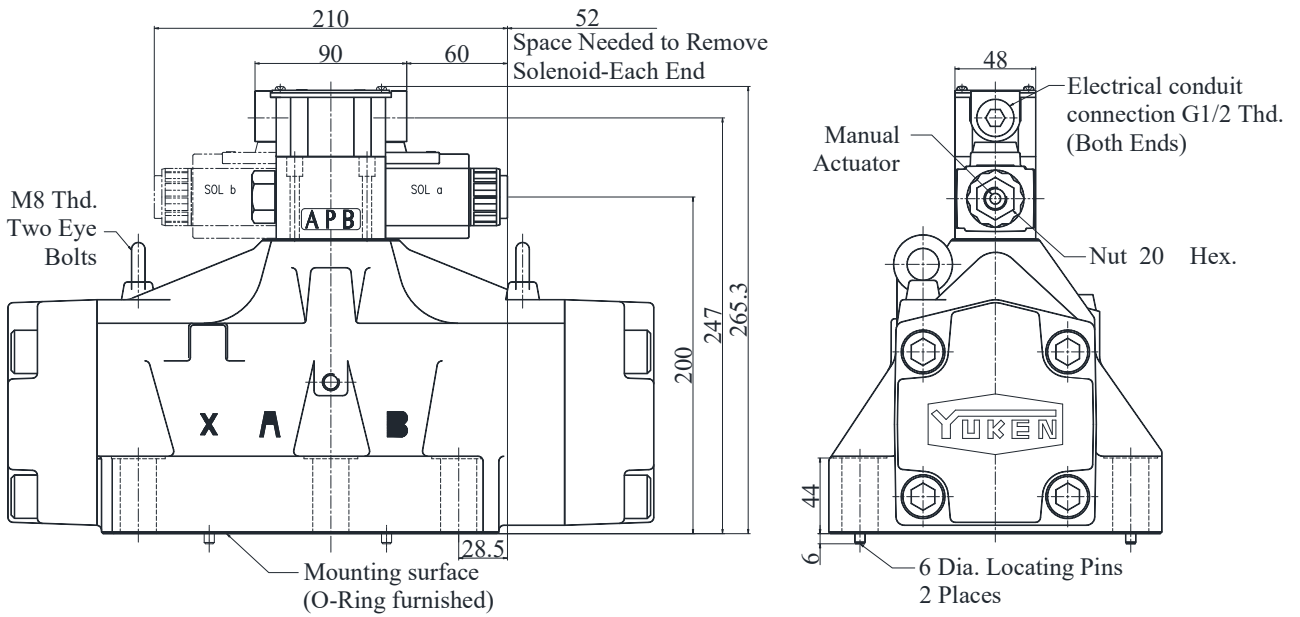


**DIMENSIONS IN MILLIMETRES**

**OPTIONS**

**Models with Pilot Choke valve**

- (S)-DSHG-06-\*\*\*-C1/C2/C1C2-<sup>04</sup><sub>10</sub> <sup>N</sup><sub>N1</sub>

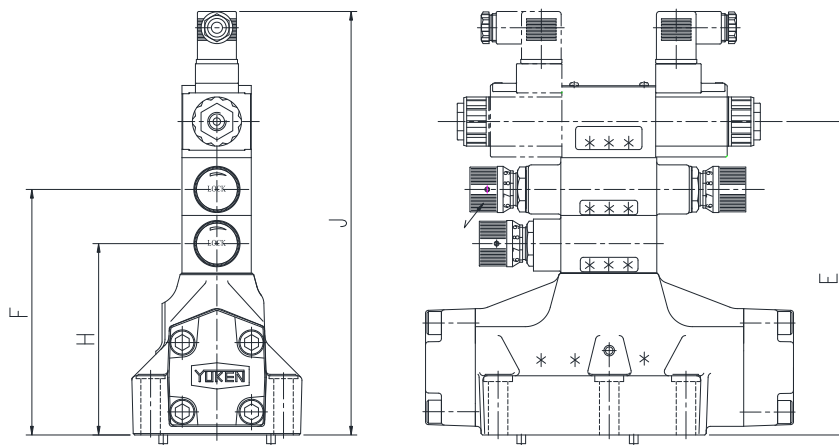

Model Numbers	Dimensions mm					
	E	F	H	J		
				AC SOL	DC SOL	R SOL
(S)-DSHG-04-***-C1	156	--	111	220	231	235
(S)-DSHG-04-***-C2	156	111	--	220	231	235
(S)-DSHG-04-***-C1C2	196	151	111	260	271	275
(S)-DSHG-06-***-C1	177	--	132	241	252	256
(S)-DSHG-06-***-C2	177	132	--	241	252	256
(S)-DSHG-06-***-C1C2	217	172	132	281	292	296
(S)-DSHG-10-***-C1	240	--	195	304	315	319
(S)-DSHG-10-***-C2	240	195	--	304	315	319
(S)-DSHG-10-***-C1C2	280	235	195	344	355	359

**Solenoid Controlled Pilot Operated Directional Valves**


OPTIONS

Models with Stroke Adjustment

04

- (S-)DSHG-06-\*\*\*-R\*

10

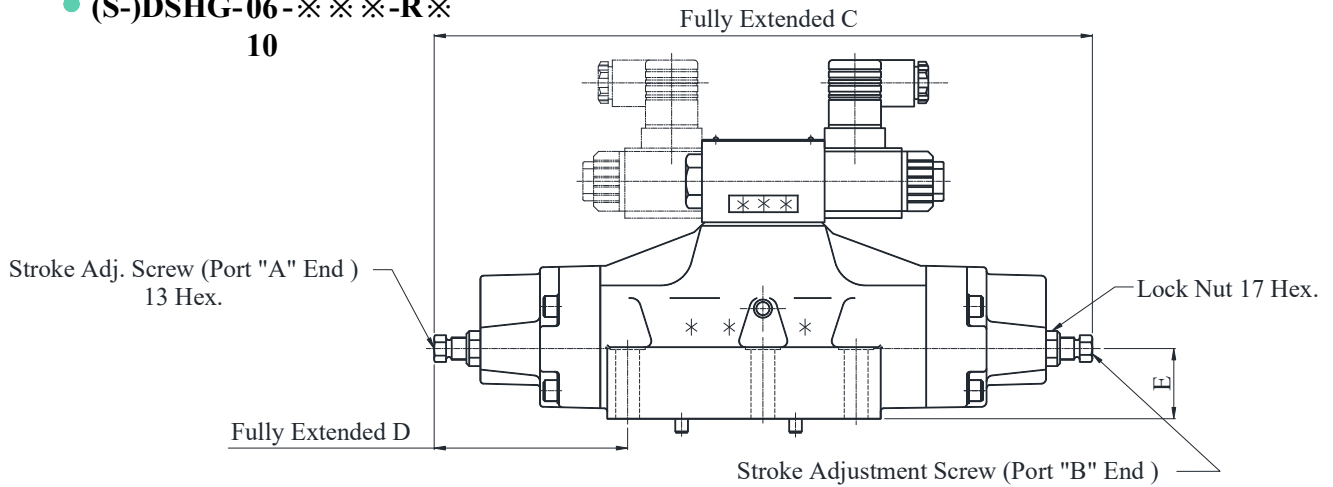


Model Numbers	C	D	E
(S-)DSHG-04-***-R2	288	94	33
(S-)DSHG-06-***-R2	376	111	40
(S-)DSHG-10-***-R2	558	164.5	65

DIMENSIONS IN MILLIMETRES


Sub-plate Model Numbers	“C” Thd.
DHGM-04-2080	1/2 BSP.F
DHGM-04X-2080	3/4 BSP.F

- Sub Plate DHGM-04-2080  
04X

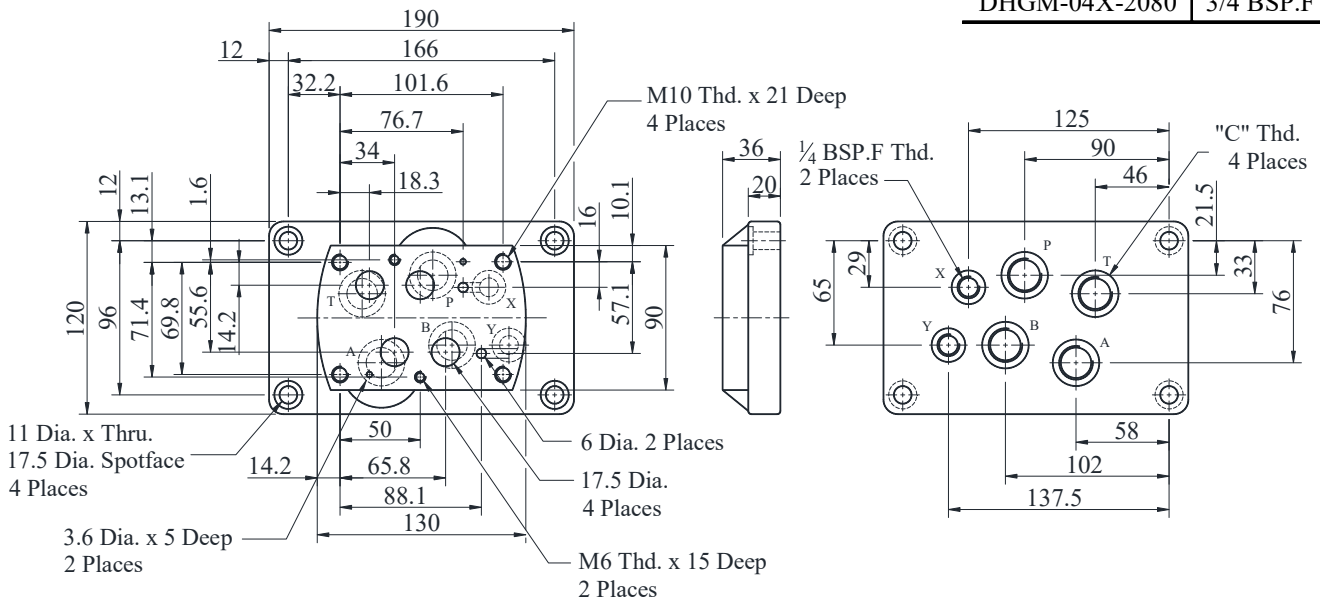

Valve Types		Pilot Pressure Port “X”	Port “Y”	Remarks
Solenoid Controlled Pilot Operated Directional Valves		Used only on external pilot type valves. To be plugged on internal pilot type Valves.	Used as drain port only on external drain type valves. To be plugged on internal pilot type Valves.	
Pilot Operated Directional Valves	Spring Centered No-Spring	Used	Used as pilot port	Normal size: Only 04
	Spring offset		Used as pilot drain port	
Manually Operated Directional Valves		Not used (plug is not required)	Used as drain port	

● **DHGM-06-5080**  
**06X**

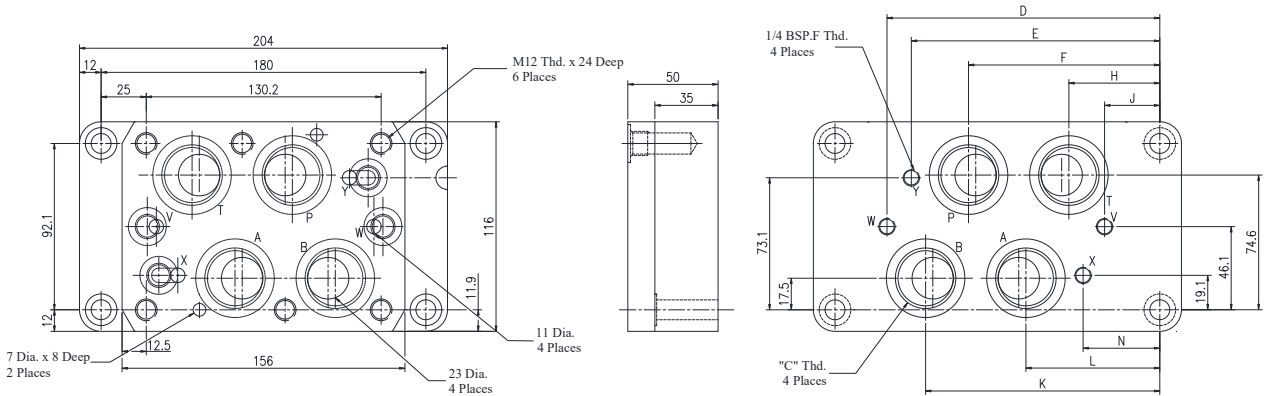


Sub-plate Model Numbers	"C" Thd.	Dimensions mm							
		D	E	F	H	J	K	L	N
DHGM-06-5080	3/4 BSP.F	151.2	137.7	102	54.4	30.6	125.8	78.2	42.5
DHGM-06X-5080	1 BSP.F	155.2	148	106	50	25	130	74	32

For uses of Port "X", "Y", "V", "W", refer to DHGM-10-※

**DIMENSIONS IN MILLIMETRES**

● **DHGM-10-4080**  
**10X**

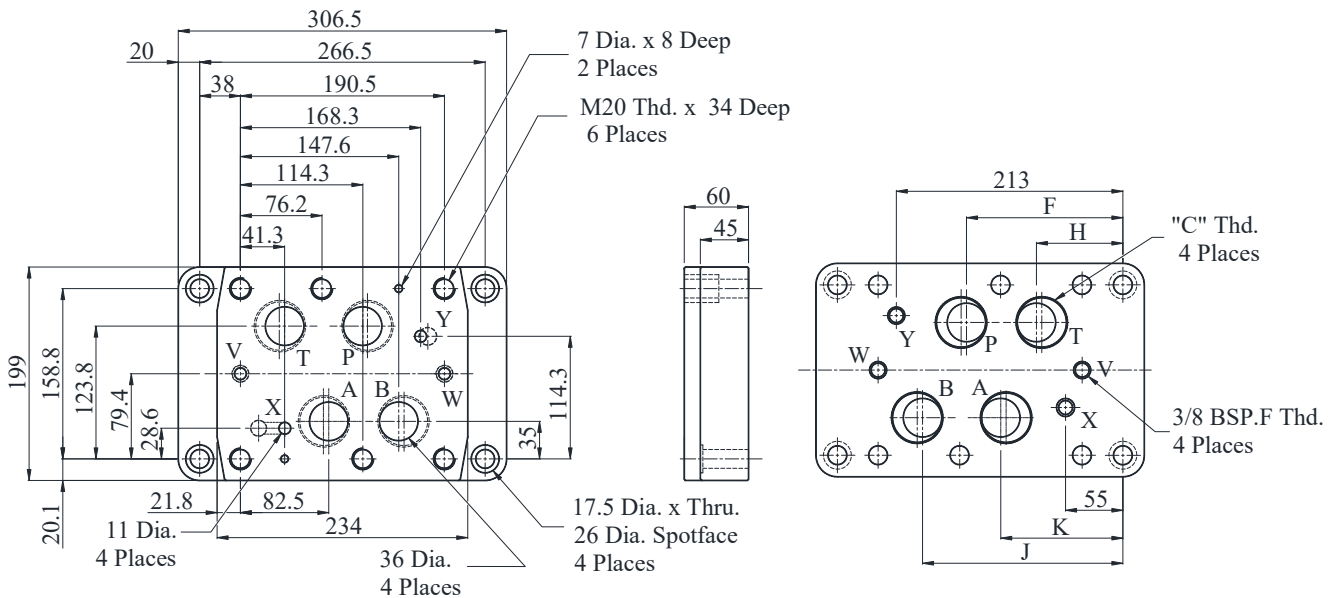

Sub-plate Model Numbers	"C" Thd.	Dimensions mm			
		F	H	J	K
DHGM-10-4080	1-1/4 BSP.F	152	79	185.5	120.5
DHGM-10X-4080	1-1/2 BSP.F	156	74	194.5	112.5


Note : Uses of port “X”, “Y”, “V” and “W”

Valve Types		Pilot Pres. Port “X”	Port “Y”	Port “V”	Port “W”
Solenoid Controlled Pilot Operated Directional Valves	Spring centered, No-spring,	Used only on external pilot type valves.  To be plugged on internal pilot type valves.	Used as drain port only on external drain type valves.  To be plugged on * internal pilot type valves.	Not used (plug is not required)	
	Spring offset				
Pilot Operated Directional Valves	Spring centered, No-spring,	Used	Used as pilot pres. Port	Not used (plug is not required)	
	Spring offset		Used pilot port drain port		
Manually Operated Directional Valves		Not used (plug is not required)	Not used (plug is not required)	Used	Not used (plug is not required)

\* As the thread is provided on the body, plug either port on the sub-plate or port on the body.


**Conversion of Internal Pilot/Drain :**

**Comparison of DSHG-04-46 and DSHG-04-50 for Internal Pilot Models.**

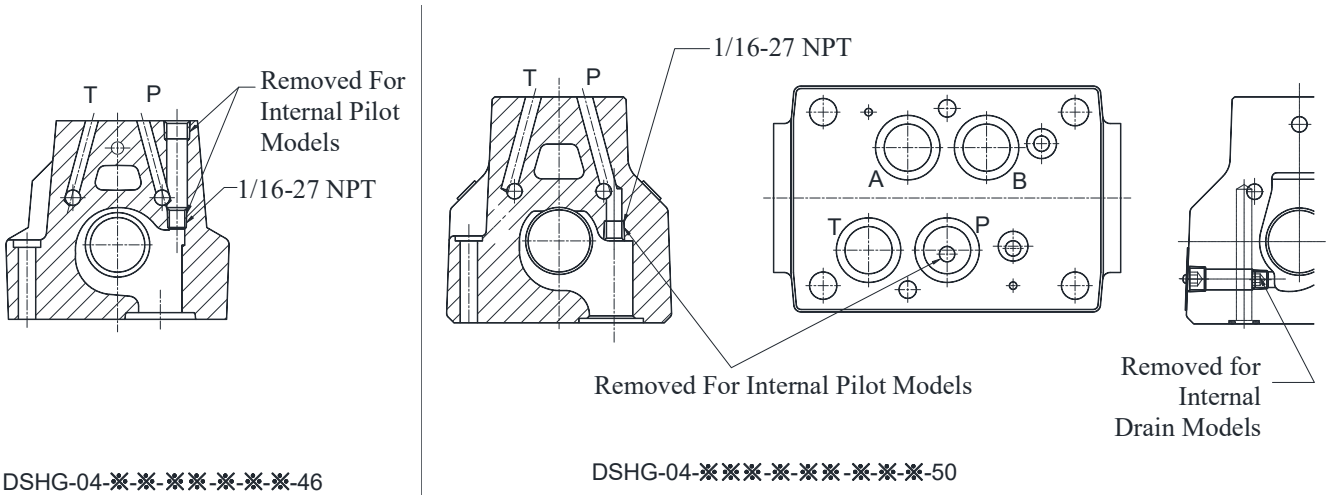

**(S-)DSHG-06-\*\*-\*\*-51**

**(S-)DSHG-10-\*\*-\*\*-41**

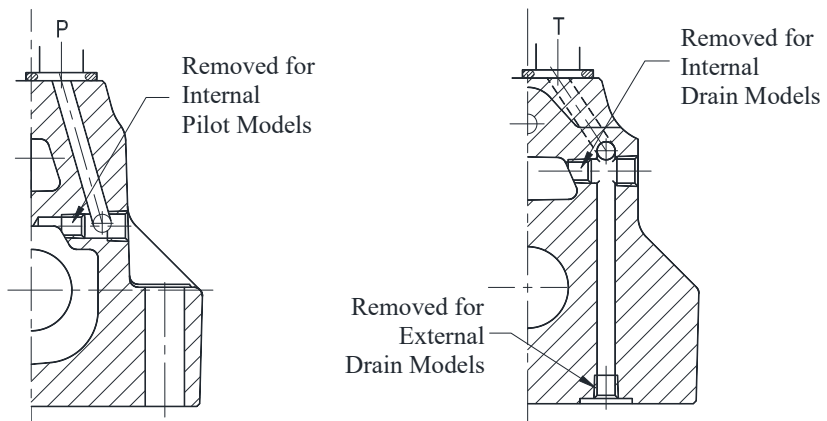



## List of Pilot Valves

Valve Model Numbers	Pilot Valve Model Numbers
(S-)DSHG-04/06/10-3C※-★-▲	DSG-01-3C4-★-▲-50
(S-)DSHG-04-2B※-★-▲	DSG-01-2B2-★-▲-50
(S-)DSHG-06/10-2B※-★-▲	DSG-01-2B2-★-▲-50-L
(S-)DSHG-04/06/10-2N※-★-▲	DSG-01-2D2-★-▲-50

Notes:

- 1 Fill coil type (a symbol representing current/voltage) in section marked ★. Likewise, in selection marked ▲, fill a symbol representing the type of conduit connection (N: Plug-in connector type).
- 2 For the details of the pilot valves, see page EIC-E-1001 Page: 331.

## Spare Parts List

### List of Seals

Sl. No.	Name of Part	Part Numbers				Qty
		DSHG-04	DSHG-06	DSHG-10		
1	O-Ring	SO-NB-P9	--	--	4	
2	O-Ring	--	SO-NB-P9	--	2	
3	O-Ring	--	SO-NB-P14		2	
4	O-Ring	--	--	SO-NB-P20	2	
5	O-Ring	--	SO-NB-P30	--	4	
6	O-Ring	SO-NB-P34	--	--	2	
7	O-Ring	--	SO-NB-P40	--	2	
8	O-Ring	--	--	SO-NB-P42	4	
9	O-Ring	--	--	SO-NB-G65	2	
10	O-Ring	SO-NB-P22	--	--	4	

Note: When ordering the seals, please specify the Seal Kit number from the table below.

### List of Seal kits

Valve Model Numbers	Seal Kit Numbers
DSHG-04	KS-DSHG-04-50
DSHG-06	KS-DSHG-06-51
DSHG-10	KS-DSHG-10-41

Note: When ordering the seals, please specify the Seal Kit number KS-DSHG-04-50/KS-DSHG-06-51/ KS-DSHG-10-41.